

Fiche Technique : Batteries Plomb Spécial

Marque : Long

Version : Original

Désignation : Batterie Plomb Spécial WP1223A

Tension : 12v

Capacité : 2,1Ah

Faston : TU

Type : Plomb

Dimensions : 180x 23x 60mm

Poids : 714g

Référence : BPS1223



MULTIBATT SRL

Tél : (+32) 69 54 53 02

E-Mail : alex@multibatt.be

Web : www.multibatt.be



WP1223A 12Volt 2.1Ah

Specifications

Nominal Voltage(V) **12V**

Nominal Capacity

20 hour rate	(0.11A to 10.50V)	2.1Ah
10 hour rate	(0.2A to 10.50V)	2.0Ah
5 hour rate	(0.36A to 10.20V)	1.79Ah
1 C	(2.1A to 9.60V)	1.19Ah
3 C	(6.3A to 9.60V)	0.84Ah

Weight **Approx. 680g(1.5Lbs.)**

Internal Resistance (at 1KHz) **Approx. 105 mΩ**

Maximum Discharge Current for

5 seconds: **42A**

Charging Methods at 25°C (77°F)

Cycle use:

Charging Voltage **14.4 to 15.0V**

Coefficient -5.0mv/°C/cell

Maximum Charging Current : **0.63A**

Standby use:

Float Charging Voltage **13.50 to 13.80V**

Coefficient -3.0mv/°C/cell

Operating Temperature Range

Charge **-15°C (5°F) to 40°C (104°F)**

Discharge **-15°C (5°F) to 50°C (122°F)**

Storage **-15°C (5°F) to 40°C (104°F)**

Charge Retention (shelf life) at 20°C (68°F)

1 month	92%
3 month	90%
6 month	80%

Case Material **ABS**



(Option: UL94 HB & UL94 V-0 flame retardant)

Terminal **F13**



Dimensions

mm(inch)

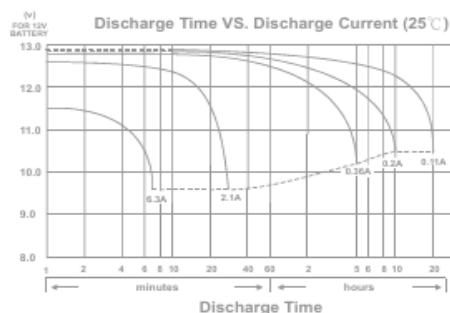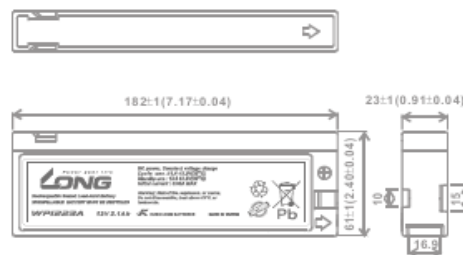

MULTIBATT SRL

Tél : (+32) 69 54 53 02

E-Mail : alex@multibatt.be

Web : www.multibatt.be

