

Fiche Technique : Batteries Plomb

Marque : Multipower

Version : Original

Désignation : Batterie Plomb 12v - 2,0Ah

Tension : 12v

Capacité : 2,0Ah

Faston : 4.8mm Spécial

Type : Plomb

Dimensions : 150x 20x 89mm

Poids : 728g

Référence : MP2-12SL

multipower

bebat



MULTIBATT SRL

Tél : (+32) 69 54 53 02




E-Mail : alex@multibatt.be

Web : www.multibatt.be



RECHARGEABLE SEALED LEAD ACID BATTERY

SPECIFICATION

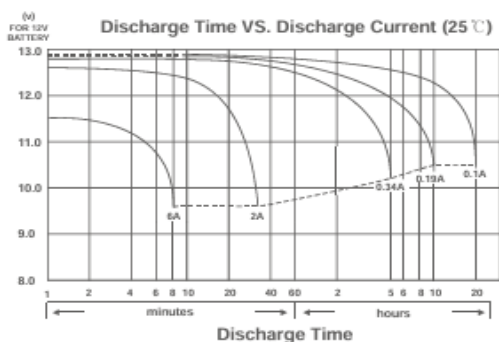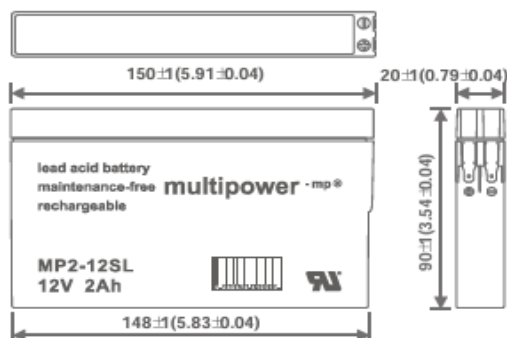

MP2-12SL

Nominal Voltage (V) 12V

Nominal Capacity

20 hour rate	(0.1A	to	10.50V)	2.00Ah
10 hour rate	(0.19A	to	10.50V)	1.90Ah
5 hour rate	(0.34A	to	10.20V)	1.70Ah
1 C	(2A	to	9.60V)	1.13Ah
3 C	(6A	to	9.60V)	0.80Ah

Weight Approx. 728g (1.60lbs)

Internal Resistance (at 1KHz) Approx. 57 mΩ

Maximum Discharge Current for
5 seconds: 30A

Charging Methods at 25°C (77°F)

Cycle use:	
Charging Voltage	14.70V to 14.80V
Coefficient -5.0mV/°C/cell	
Maximum Charging Current:	0.6A
Standby use:	
Float Charging Voltage	13.50V to 13.80V
Coefficient -3.0mV/°C/cell	

Operating Temperature Range

Charge	-15°C (5°F)	to	40°C (104°F)
Discharge	-15°C (5°F)	to	50°C (122°F)
Storage	-15°C (5°F)	to	40°C (104°F)

Charge Retention (shelf life) at 20°C (68°F)

1 month	92%
3 month	90%
6 month	80%

Case Material ABS
(UL94 HB flame retardant case / cover)

Terminal F1

MULTIBATT SRL

Tél : (+32) 69 54 53 02

E-Mail : alex@multibatt.be

Web : www.multibatt.be

