

Fiche Technique : Batteries Plomb

Marque : Multipower

Version : Original

Désignation : Batterie Plomb 12v - 4,0Ah

Tension : 12v

Capacité : 4,0Ah

Faston : 6,3mm

Type : Plomb

Dimensions : 195x 47x 70mm

Poids : 1,55kg

Référence : MP4-12D

multipower

bebat



MULTIBATT SRL

Tél : (+32) 69 54 53 02



E-Mail : alex@multibatt.be

Web : www.multibatt.be



RECHARGEABLE SEALED LEAD ACID BATTERY

SPECIFICATION

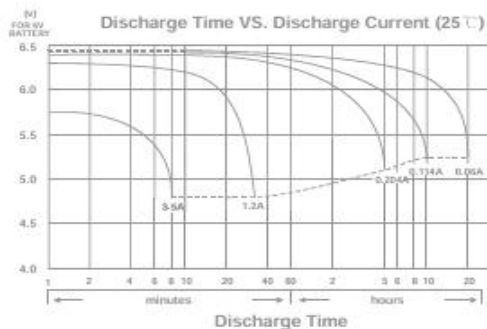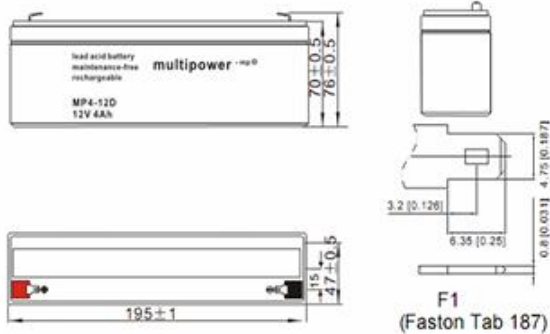

MP4-12D

Nominal Voltage(V) 12V

Nominal Capacity

20 hour rate	(0.200A	to	5.4V)	4.00Ah
10 hour rate	(0.372A	to	5.4V)	3.72Ah
5 hour rate	(0.672A	to	5.25V)	3.36Ah
1 C	(4.0A	to	4.8V)	2.08Ah
3 C	(12.0A	to	4.8V)	1.40Ah

Weight Approx. 1600g(3.53Lbs.)

Internal Resistance (at 1KHz) Approx. 45 mΩ

Maximum Discharge Current for

5 seconds: 60A

Charging Methods at 25°C(77°F)

Cycle use:
Charging Voltage 14.4 to 15.0V
Coefficient -30.0mv/°C/cell
Maximum Charging Current: 1.2 A
Standby use:
Float Charging Voltage 13.5 to 13.8V
Coefficient -20mv/°C/cell

Operating Temperature Range

Charge 0°C(32°F) to 40°C(104°F)
Discharge -15°C(5°F) to 50°C(122°F)
Storage -15°C(5°F) to 40°C(104°F)

Charge Retention (shelf life) at 20°C(68°F)

1 month 92%
3 month 90%
6 month 80%

Case Material ABS
(UL94 HB flame retardant case / cover)

Terminal F1(Faston Tab 187)

MULTIBATT SRL

Tél : (+32) 69 54 53 02

E-Mail : alex@multibatt.be

Web : www.multibatt.be

