





Halogenlampen mit Justiersockel / Halogen lamps with prefocus base and mounting plate

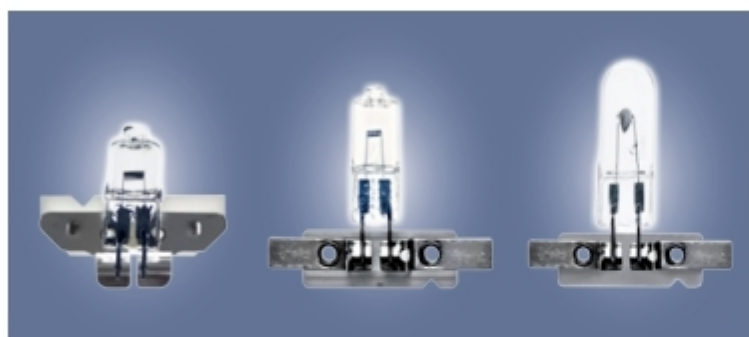


Figur 1 / Figure 1




Figur 2 / Figure 2



Figur 2.1 / Figure 2.1



Figur 2.2 / Figure 2.2



Figur 3 / Figure 3

Art.-Nr. Ref.-No.	Typ Type	Nennspannung Voltage (V)	Leistung Wattage (W)	Socket Base	Lichtstrom Luminous flux (lm)	Lebensdauer Life (h)	LK ⁰ Abmessungen Filament dimensions (mm)	Brennstellung Operating position	Figur Figure
55166 ^b	HLL5-X	5	30	PY16-1,25	650	150	0,9 x 1,7	s90	1
55122	HLW55	6	10	PY16-1,25	195	100	1,9 x 0,5	s90	1
55125	HLW55	6	10	PY16-1,25	150	100	1,2 x 1,1	s90	1
55128	HLW55	5	20	PY16-1,25	300	800	1,7 x 1,7	s90	1
55133	HLW55	6	20	PY16-1,25	450	100	1,9 x 1,4	s90	1
55147	HLW55-A	6	25	PY16-1,25	510	100	1,7 x 1,7	s90	1
55149	HLW55	6	25	PY16-1,25	525	75	2,7 x 1,2	s90	1
55168	HLW55-A	6	30	PY16-1,25	660	100	1,7 x 1,7	s90	1
55176	HLW55	12	37	PY16-1,25	900	400	2,5 x 2,2	s90	1
55140	HLW55-A	12	20	PY16-1,25	350	1000	1,9 x 1,9	s90	1
55171	HLW55	12	35	PY16-1,25	800	1000	3,2 x 1,6	s90	1
55204	HLW55	12	50	PY24-1,5	1400	50	3,3 x 1,9	s90	2
55205	HLW55-A	12	50	PY24-1,5	1400	50	2,2 x 2,4	s90	2
55305	HLW55	12	100	PY24-1,5	3000	50	4,2 x 2,3	s90	2
55307	HLW55-A	12	100	PY24-1,5	3000	50	3,1 x 3,1	s90	2
55507	HLW55-A	24	250	PY24-1,5	8500	50	5,0 x 5,0	s90	2.1
55405	HLW55	24	150	PY24-1,5	5000	50	5,8 x 3,1	s90	2.2
57055	HLW55-P	24	200	PY24-1,5	5500	300	4,5 x 6,4	s90	3

Weitere Produkte oder Entwicklungen auf Anfrage. Further products and developments on request.