

Fiche Technique : Batteries Plomb

**Marque** : Long

**Version** : Original

**Désignation** : Batterie Plomb 6v - 1,2Ah

**Tension** : 6v

**Capacité** : 1,2Ah

**Faston** : 4.8mm

**Type** : Plomb

**Dimensions** : 97x 25x 52mm (54)

**Poids** : 297g

**Référence** : WP1,2-6



**MULTIBATT SRL**

Tél : (+32) 69 54 53 02

E-Mail : alex@multibatt.be

Web : www.multibatt.be



## WP1.2-6 6Volt 1.2Ah



### Specifications

<b>Nominal Voltage(V)</b>				<b>6V</b>
<b>Nominal Capacity</b>				
20 hour rate	(0.06A to	5.25V)		<b>1.2Ah</b>
10 hour rate	(0.114A to	5.25V)		<b>1.14Ah</b>
5 hour rate	(0.204A to	5.1V)		<b>1.02Ah</b>
1 C	(1.2A to	4.8V)		<b>0.68Ah</b>
3 C	(3.6A to	4.8V)		<b>0.48Ah</b>
<b>Weight</b>	Approx. 297g(0.65Lbs.)			
<b>Internal Resistance (at 1KHz)</b>	Approx. 41 mΩ			
<b>Maximum Discharge Current for 5 seconds:</b>				
				<b>18A</b>
<b>Charging Methods at 25°C (77°F)</b>				
<b>Cycle use:</b>				
Charging Voltage				<b>7.20 to 7.50V</b>
Coefficient	-5.0mV/°C/cell			
Maximum Charging Current :				<b>0.36A</b>
<b>Standby use:</b>				
Float Charging Voltage				<b>6.75 to 6.90V</b>
Coefficient	-3.0mV/°C/cell			
<b>Operating Temperature Range</b>				
Charge	-15°C (5°F)	to	40°C (104°F)	
Discharge	-15°C (5°F)	to	50°C (122°F)	
Storage	-15°C (5°F)	to	40°C (104°F)	
<b>Charge Retention (shelf life) at 20°C (68°F)</b>				
1 month				<b>92%</b>
3 month				<b>90%</b>
6 month				<b>80%</b>
<b>Case Material</b>	ABS UL94 HB			
	Option: Flammability resistance of (UL94 V-0)			
<b>Terminal</b>	<b>F1 or F2 (Faston Tab 187 or 250)</b>			



### Dimensions

mm(inch)

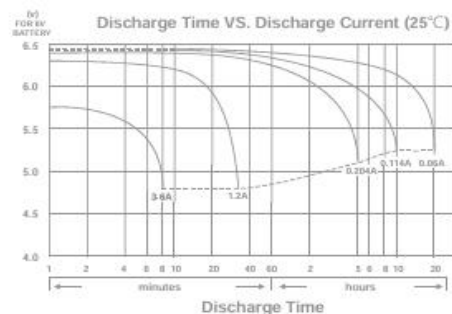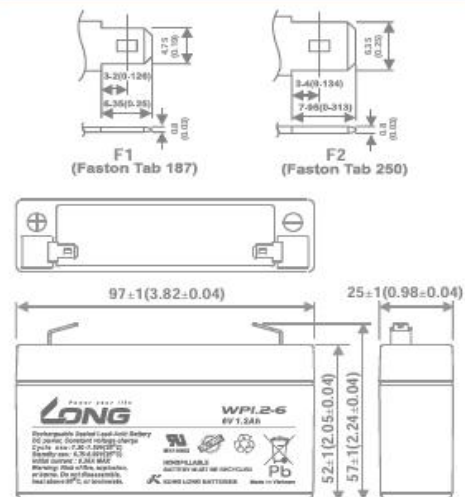

**MULTIBATT SRL**

Tél : (+32) 69 54 53 02

E-Mail : alex@multibatt.be

Web : www.multibatt.be

