

Fiche Technique : Batteries Plomb

Marque : Long

Version : Original

Désignation : Batterie Plomb 6v - 1,2Ah

Tension : 6v

Capacité : 1,2Ah

Faston : 4.8mm

Type : Plomb

Dimensions : 97x 25x 52mm (54)

Poids : 297g

Référence : WP1,2-6



MULTIBATT SRL

Tél : (+32) 69 54 53 02

E-Mail : alex@multibatt.be

Web : www.multibatt.be





RECHARGEABLE SEALED LEAD ACID BATTERY

Supplier of Energy

WP1.2-6 6Volt 1.2Ah

Specifications

Nominal Voltage(V) **6V**

Nominal Capacity

20 hour rate	(0.06A to 5.25V)	1.2Ah
10 hour rate	(0.114A to 5.25V)	1.14Ah
5 hour rate	(0.204A to 5.1V)	1.02Ah
1 C	(1.2A to 4.8V)	0.68Ah
3 C	(3.6A to 4.8V)	0.48Ah

Weight **Approx. 297g(0.65Lbs.)**

Internal Resistance (at 1KHz) **Approx. 41 mΩ**

Maximum Discharge Current for
5 seconds: **18A**

Charging Methods at 25°C (77°F)

Cycle use:

Charging Voltage **7.20 to 7.50V**

Coefficient -5.0mV/°C/cell

Maximum Charging Current : **0.36A**

Standby use:

Float Charging Voltage **6.75 to 6.90V**

Coefficient -3.0mV/°C/cell

Operating Temperature Range

Charge **-15°C (5°F) to 40°C (104°F)**

Discharge **-15°C (5°F) to 50°C (122°F)**

Storage **-15°C (5°F) to 40°C (104°F)**

Charge Retention (shelf life) at 20°C (68°F)

1 month **92%**

3 month **90%**

6 month **80%**

Case Material **ABS UL94 HB**



Option: Flammability resistance of (UL94 V-0)

Terminal **F1 or F2 (Faston Tab 187 or 250)**



Dimensions

mm(inch)

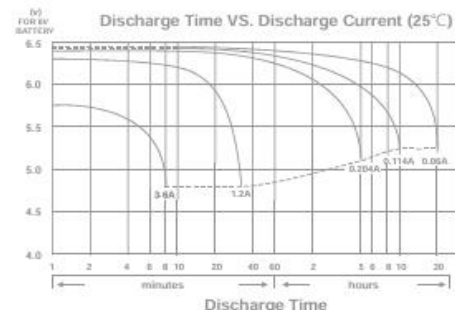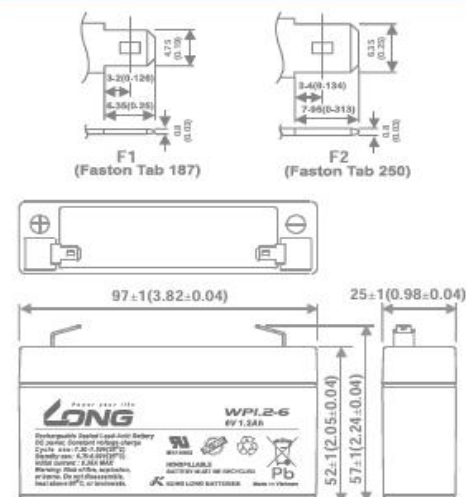

MULTIBATT SRL

Tél : (+32) 69 54 53 02

E-Mail : alex@multibatt.be

Web : www.multibatt.be

