

Product datasheet

DECOSTAR 51 PRO 20 W 12 V 10° GU5.3

DECOSTAR 51 PRO | Halogen dichroic reflector lamps with 51 mm diameter

- - General illumination- Kitchen lighting- Dining table lighting- Mirror lighting- Workplace lighting- Shops- Restaurants, hotels and similar prestigious applications



- - Brilliant accent lighting- Significantly lower CO2 emissions compared to standard version- Constant luminous intensity and constant color location throughout the lifetime- Approved for use in open luminaires (to IEC 60598-1)- UV filter- Contains no mercury
- Product features- Average life: 5,000 h - 100 % dimmable - Color rendering index Ra: 100 - Color temperature: 3,000 K - Diameter: 51 mm - Deco cover - IRC technology Product benefits- Brilliant accent lighting - Significantly lower CO2 emissions compared to standard version - Constant luminous intensity and constant color location throughout the lifetime - Approved for use in open luminaires (to IEC 60598-1) - UV filter - Contains no mercury Areas of application- General illumination - Kitchen lighting - Dining table lighting - Mirror lighting - Workplace lighting - Shops - Restaurants, hotels and similar prestigious applications

Product datasheet

Technical data

Electrical data

Nominal wattage	20.00 W
Nominal voltage	12 V
Rated wattage	20.00 W
Claimed equiv. conventional lamp power	35 W


Photometrical data

Nominal useful luminous flux 90°	300 lm
Luminous intensity	5500 cd
Light color (designation)	Warm White
Rated color temperature	3000 K
Color rendering index Ra	100
Lumen main.fact.at end of nom.life time	0.75
Rated luminous flux	380 lm
Nominal luminous flux	380 lm
Rated useful luminous flux 90°	300 lm
Rated peak intensity	5500 cd
Color temperature	3000 K
Luminous flux	380 lm

Light technical data

Beam angle	10 °
Nominal beam angle	10 °
Starting time	0.0 s
Rated beam angle (half peak value)	10.00 °

Dimensions & weight



Product datasheet

Diameter	51.0 mm
Overall length	45.0 mm
Outer bulb	MR51
Product weight	31.65 g
Length	46.0 mm
Maximum diameter	51.0 mm

Lifespan

Rated lamp life time	5000 h
Number of switching cycles	125000

Additional product data

Base (standard designation)	GU5.3
Mercury content	0.0 mg
Mercury-free	Yes

Capabilities

Burning position	Any
Dimmable	Yes

Certificates & standards


Energy efficiency class	B
Energy consumption	22 kWh/1000h

Country specific categorizations

ILCOS	HRGS//UBIB-20-12-GU5.3-51/10
Order reference	48860 PRO SP 20

Product datasheet

Light Distribution

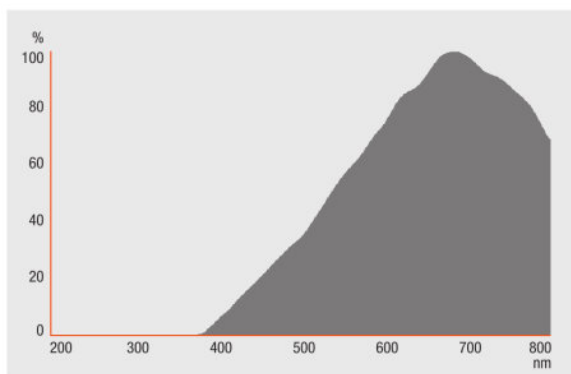

Spectral power distribution

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300620169	DECOSTAR 51 PRO 20 W 12 V 10° GU5.3	Shipping carton box 20 Pieces Folding carton box	238 mm x 122 mm x 123 mm	3.57 dm ³	836.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

For light distribution curves see

▶ www.osram.com

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany