

Fiche Technique : Batteries Plomb

Marque : Multipower

Version : Original

Désignation : Batterie Plomb Multipower 12v - 0.8Ah

Tension : 12v

Capacité : 0.8Ah

Connecteur : JST

Type : Plomb

Dimensions : 96x 25x 61.5mm

Poids : 0.35kg

Référence : MP0.8-12S

multipower

bebat



MULTIBATT SRL



Tél : (+32) 69 54 53 02

E-Mail : alex@multibatt.be

Web : www.multibatt.be



SPECIFICATION

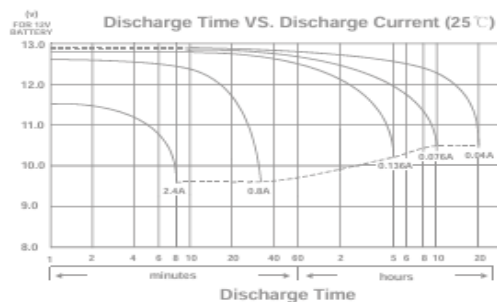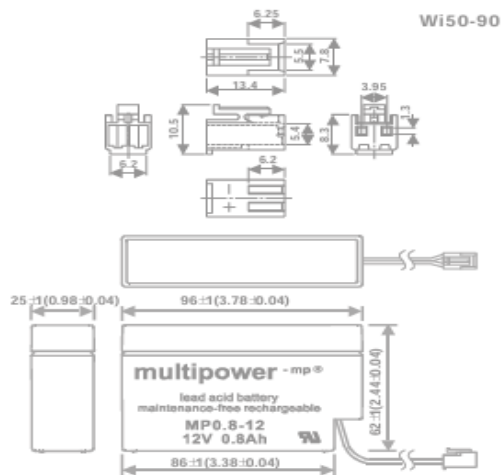

MP0,8-12 / JST

Nominal Voltage (V)	12V
---------------------	-----

Nominal Capacity

20 hour rate	(0.04A	to	10.50V)	0.80Ah
10 hour rate	(0.076A	to	10.50V)	0.76Ah
5 hour rate	(0.136A	to	10.20V)	0.68Ah
1 C	(0.8 A	to	9.60V)	0.45Ah
3 C	(2.4A	to	9.60V)	0.32Ah

Weight Approx. 370g (0.82lbs)

Internal Resistance (at 1KHz) Approx. 125 mΩ

**Maximum Discharge Current for
5 seconds: 12A**

Charging Methods at 25°C (77°F)

Cycle use:	
Charging Voltage	14.70V to 14.80V
Coefficient -5.0mV/°C/cell	
Maximum Charging Current:	0.24A
Standby use:	
Float Charging Voltage	13.50V to 13.80V
Coefficient -3.0mV/°C/cell	

Operating Temperature Range

Charge	-15°C (5°F)	to	40°C (104°F)
Discharge	-15°C (5°F)	to	50°C (122°F)
Storage	-15°C (5°F)	to	40°C (104°F)

Charge Retention (shelf life) at 20°C (68°F)

1 month	92%
3 month	90%
6 month	80%

Case Material ABS
(UL94 HB flame retardant case / cover)

Terminal WIRE

MULTIBATT SRL

Tél : (+32) 69 54 53 02

E-Mail : alex@multibatt.be

Web : www.multibatt.be

